


H Series Compression Couplings

Recommended for heavy wall pipe and tube applications where increased axial loads are present and the potential for tube separation exists. Provides the ultimate stability while guarding against pressure leaks. Type H couplings are rated for up to 200PSI static pressure.



Designed for heavy duty applications

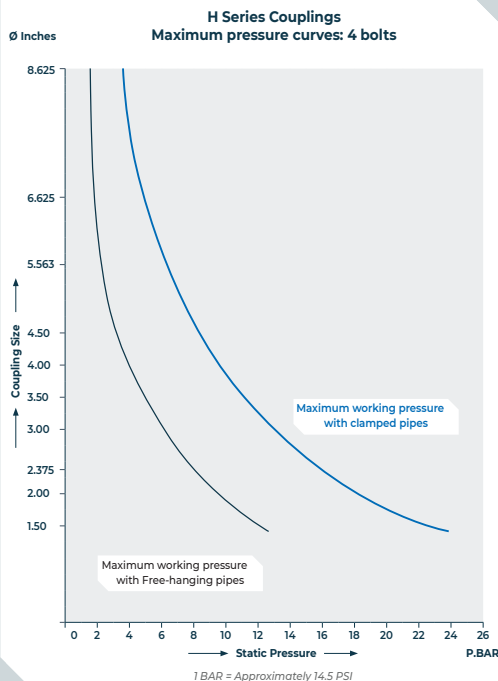

H Series coupling features:

- 4 bolt configurations
- Available with stainless steel gasket protectors
- Advanced "Eyelet" design improves conductivity
- Flanged nuts reduce installation time

New advanced eyelet design for conductivity

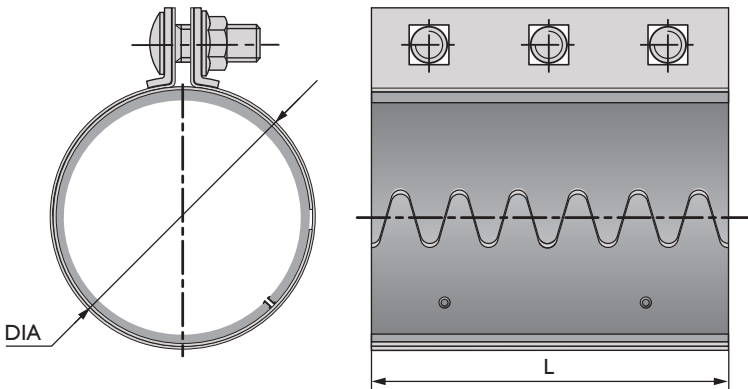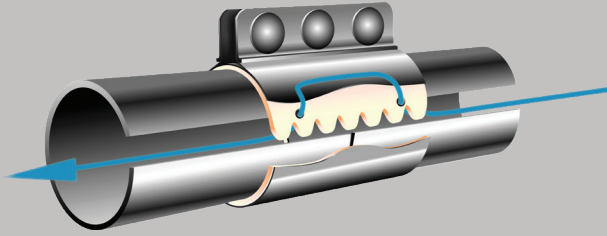

L Inches	4 Bolts
	7.87

SPECIFICATIONS AND STANDARDS

- Sizes range from 3.50" OD to 8.625" OD
- Black gaskets are abrasion resistant SBR
- White gaskets are FDA approved NBR
- Galvanized steel inner and outer sleeves

OPTIONS

- T304 Stainless steel construction
- White VMQ silicon gaskets for high temp applications
- Black FPM Viton gaskets for caustic environments
- Stainless steel gasket protectors
- Bar and clamp assemblies to hold connected pipe and tube in place

TYPE H

PART NUMBER	COUPLING SIZE OD (IN)	NUMBER OF BOLTS	GASKET COLOR
50604-351410	3.500	4	BLACK
50604-351420	3.500	4	WHITE
50604-401410	4.000	4	BLACK
50604-401420	4.000	4	WHITE
50604-451410	4.500	4	BLACK
50604-451420	4.500	4	WHITE
50604-501410	5.000	4	BLACK
50604-501420	5.000	4	WHITE
50604-551410	5.563	4	BLACK
50604-551420	5.563	4	WHITE
50604-601410	6.000	4	BLACK
50604-601420	6.000	4	WHITE
50604-661410	6.625	4	BLACK
50604-661420	6.625	4	WHITE
50604-801410	8.000	4	BLACK
50604-801420	8.000	4	WHITE
50604-861410	8.625	4	BLACK
50604-861420	8.625	4	WHITE